

Raybo 75 ProtectR

FEATURES
NITRITE FREE FREE OF HEAVY METALS RESISTS CORROSION UNDERCUTTING
SYSTEM
EMULSION WATER REDUCIBLE SOLVENT
COMMENTS
COMPLEMENTARY TO CORROSION RESISTANT PIGMENTS
USAGE
1-2% OF TOTAL WEIGHT

Raybo 75 ProtectR is a hydrophobic complex formulated to provide long term corrosion protection to emulsion, water reducible, and solvent based coatings. Raybo 75 ProtectR chemiadsorbs to steel providing increased adhesion, prevent undercutting, and providing a hydrophobic barrier to resist moisture attack.

PHYSICAL DATA**

Weight/Gallon.....8.14 lbs.
Consistency.....Thick Liquid
Melting Point.....<0°F

** Typical Properties; not sales specifications

CONTAINER SIZES

North American: 5 gal. Pail*, 55 gal. Drum, Bulk
Global Zones: 5 gal Pail*, 55 gal. Drum
* One gallon containers available upon request.

We've got

HISTORY

For more than 60 years Raybo Chemical Company has provided the global coatings and ink industries with specialty performance chemicals.

Representatives in

31 Countries

We're still

DEVELOPING NEW TECHNOLOGIES

Our continuing success is rooted in our commitment to partnering with our customers, ensuring that we anticipate and respond to their ever-changing needs. We have built an excellent reputation by supplying innovative products, produced to the highest quality standards, supported through a dependable global distribution network.


Raybo Chemical Company

- ▶ CORPORATE OFFICES
- ▶ RESEARCH AND DEVELOPMENT
- ▶ MANUFACTURING

P.O. BOX 2155 • HUNTINGTON, WV 25721
PHONE: 304-525-5171
FAX: 304-525-2921



For the prevention of corrosion in water and solvent formulations

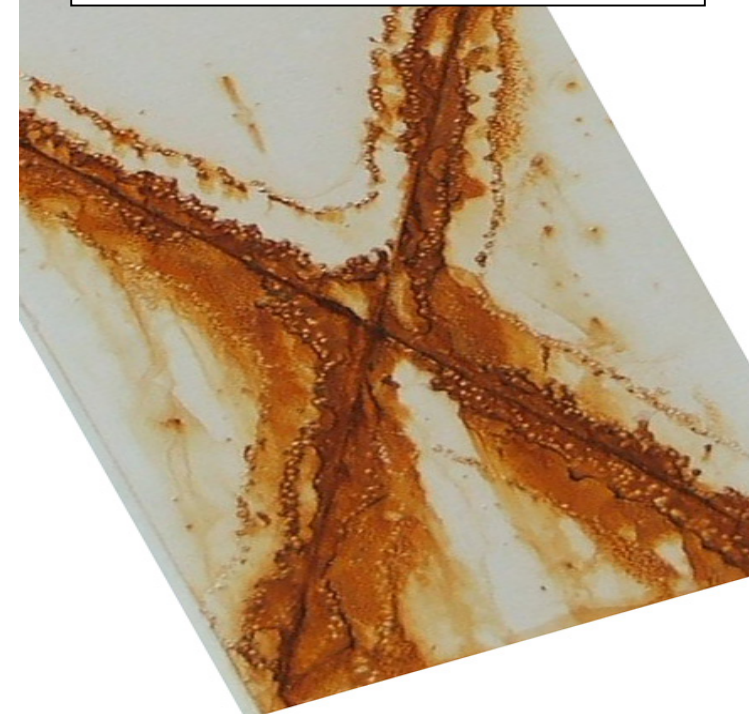

Raybo 75 ProtectR

corrosion inhibitors ~ surface modifiers ~ dispersants ~ powder ~ ink additives ~ specialty

100% Acrylic Water Based Direct to Metal Enamel-White

-----Grind Phase-----

Water	13.3
Glycol Ether DPM ¹	49.8
Tamol 165A ²	10.4
Ammonia	1.6
Triton CF 10 ²	2.0
TiPure R-900 ³	195.0


-----Letdown Phase-----

Maincote HG 54D ²	629.9
Butyl Cellosolve ¹	31.4
Ektasolve EEH ⁴	5.3
Raybo 75 ProtectR ⁵	19.2

Properties

pH	9.2
Wet Film Thickness	3.0 mils

- | | |
|----------------|--------------------|
| 1 Dow Chemical | 4 Eastman Chemical |
| 2 Rohm & Haas | 5 Raybo Chemical |
| 3 DuPont | |

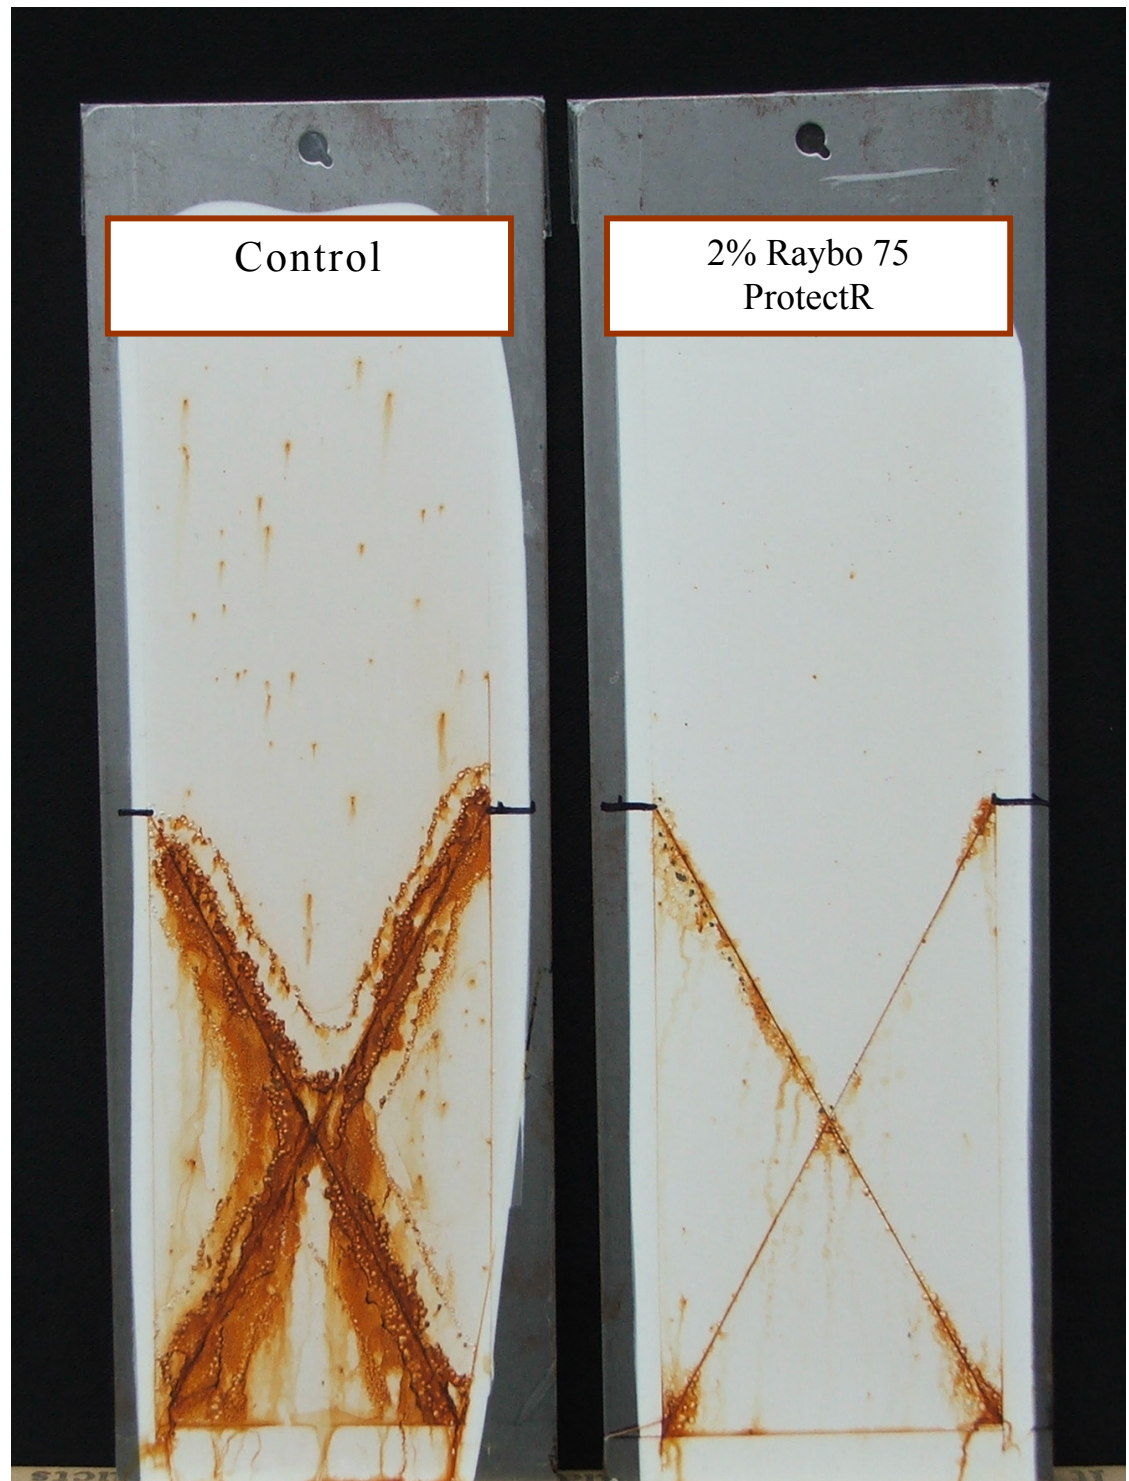

96 Hrs. Salt Spray - Cold Rolled Steel Q Panels